


ATTENTION: IMPORTANT MOUNTING INFORMATION

ENSURE THE END USER IS AWARE OF THESE REQUIREMENTS

THE INFORMATION IN THIS DOCUMENT APPLIES TO THE FOLLOWING THULE TOWBALL MOUNT CARRIERS:
VELOCOMPACT 926, VELOSPACE 918, VELOSPACE XT 938 & 939, EASYFOLD XT 933 & 934, EPOS 9781 & 9791,
ONTO 9059 AND ARCOS TOWBAR PLATFORM

The above THULE carriers feature a precision towball coupling mechanism (the Hercules coupler) which is designed for use **ONLY** with 50mm towballs meeting the ISO1103 standard, as pictured below.

THULE carriers fitted with the Hercules coupler **ARE NOT COMPATIBLE** with 1 7/8" (47mm) towballs commonly fitted to vehicles in New Zealand, nor is the coupler compatible with "convert-a-ball" type towballs where the user can change between 1 7/8" and 50mm balls without demounting the towball shank

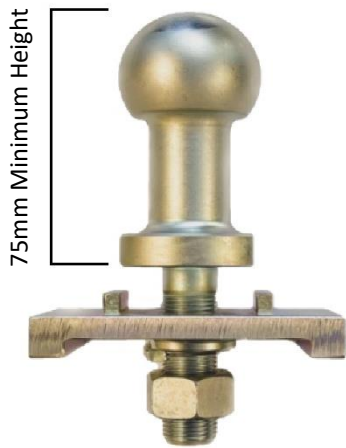

The towball must have a minimum of 75mm in overall height, and have a flat section on the underside of the ball. Towballs that do not meet this criteria will result in the clamp mechanism engaging incorrectly leading to either coupler damage, or an insecure carrier.

Sport & Cargo NZ can supply European Towballs in the following options:

- 3/4" (19mm) hole – TOWBALLHR50X19
- 7/8" (22mm) hole – TOWBALLHR50X22
- 1" (25mm) hole – TOWBALLHR50X25

For further information or to clarify this instruction contact us at info@sportandcargo.co.nz

